

HR BA **Tehnički list**

PREMIUM100

LED reflektor

100 W | 4200 K | 15 000 lm

- Premium serija, 150 lm / W
- MEANWELL LED driver
- Mogućnost dimovanja za prilagodljivo osvjetljenje u raznim okruženjima



Osnovne informacije

• Model	PREMIUM100
• LED diode	San`an
• Boja artikla	Siva
• IP stupanj zaštite	IP66
• IK stupanj zaštite	IK08
• Materijal	Aluminij + staklo

Električne specifikacije

• Snaga	100 W
• Napon	AC 100 - 277 V / 50 - 60 Hz
• Dimabilnost	3 u 1 (0 - 10V, 10V, PWM)
• Radna temperatura:	-30 °C do 45 °C

Osvjetljenje

• FLUX	15 000 lm
• Svjetlosna učinkovitost	150 lm / W
• Boja svjetlosti	Neutralna / dnevna
• CCT	4200 K
• Indeks prikaza boja (CRI)	70
• Kut svjetlosti	120°
• Radni vijek	50 000 radnih sati
• PF	0.95


Logističke informacije

• Neto težina	
• Bruto težina	
• Dimenzije pakiranja	300 x 70 x 390 mm
• Transportno pakiranje	4 komada

Dimenzije

- Dimenzije artikla

278 x 52 x 369 mm

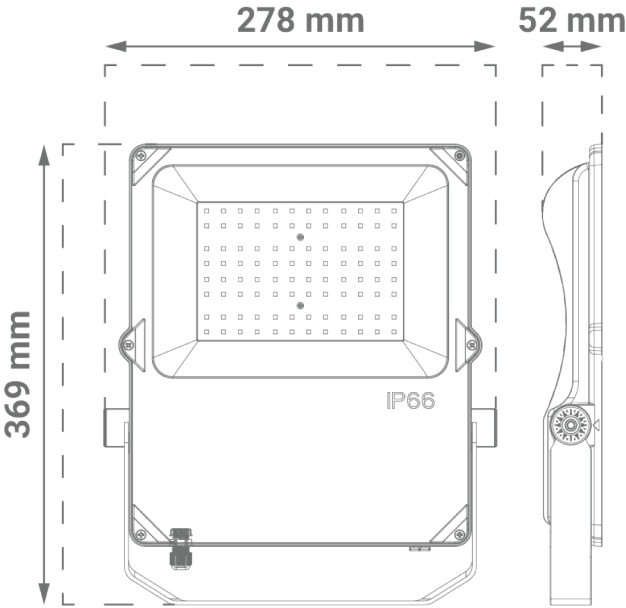

SI Podatkovni list izdelka

PREMIUM100

LED reflektor
100 W | 4200 K | 15 000 lm

- Serija Premium, 150 lm / W
- LED MEANWELL
- Funkcija zatemnitve za prilagodljivo osvetlitev v različnih okoljih



Osnovni podatki

• Model	PREMIUM100
• LED diode	San`an
• Barva izdelka	Siva
• IP stopnja	IP66
• IK stopnja	IK08
• Material	Aluminij + steklo
• Namestitev	Vgradnja v notranjost

Električne specifikacije

• Moč	100 W
• Napetost	AC 100 - 277 V / 50 - 60 Hz
• Zatemnitev	3 v 1 (0 - 10V, 10V, PWM)
• Delovna temperatura	-30 °C do 45 °C

Osvetlitev

• FLUX	15 000 lm
• Svetlobna učinkovitost	150 lm / W
• Barva svetlobe	Nevtralna
• CCT	4200 K
• Indeks barvne reprodukcije (CRI)	70
• Svetlobni kot	120°
• Življenjska doba	50 000 delovnih ur
• PF	0.95


Logistični podatki

• Neto teža	
• Bruto teža	
• Dimenzije paketa	300 x 70 x 390 mm
• Transportna embalaža	4 kosov

Dimenzije

- Dimenzije izdelka

278 x 52 x 369 mm

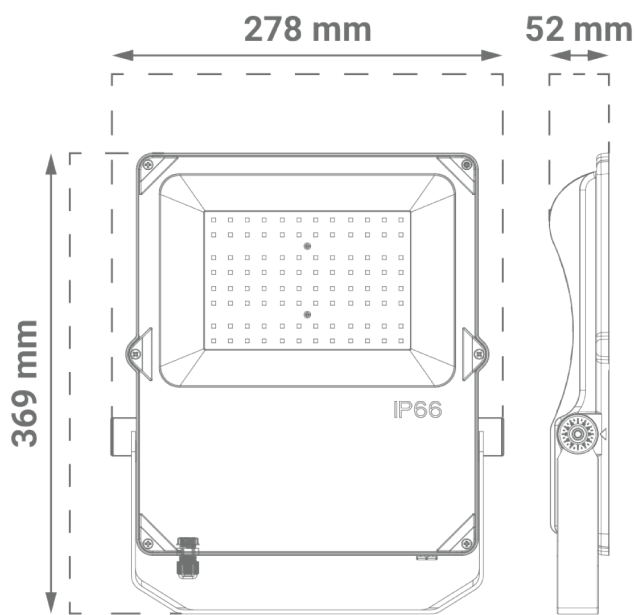

DE Produktdatenblatt

PREMIUM100

LED-Flutlicht

100 W | 4200 K | 15 000 lm

- Premium-Serie, 150 lm / W
- MEANWELL LED-Treiber
- Dimmbare Funktionalität für einstellbare Beleuchtung in verschiedenen Umgebungen



Allgemeine Informationen

• Modell	PREMIUM100
• LED Diode	San`an
• Produktfarbe	Grau
• IP-Schutzart	IP66
• IK-Schutzrat	IK08
• Material	Aluminium + Glas
• Einbau	Versenkte Montage

Elektrische Spezifikationen

• Leistung	100 W
• Spannung	AC 100 - 277 V / 50 - 60 Hz
• Dimmbare Funktion	3 in 1 (0 - 10V, 10V, PWM)
• Arbeitstemperatur	-30 °C bis 45 °C

Beleuchtung

• FLUX	15 000 lm
• Lichtausbeute	150 lm / W
• Helle Farbe	Neutral
• CCT	4200 K
• Farbwiedergabeindex (CRI)	70
• Lichtwinkel	120°
• Lebensdauer	50 000 Arbeitsstunden
• PF	0.95


Logistik-Informationen

• Nettogewicht	
• Bruttogewicht	
• Abmessungen der Verpackung	300 x 70 x 390 mm
• Abmessungen der Transportverpackung	4 Stück

Abmessungen

- Abmessungen des Produkts

278 x 52 x 369 mm

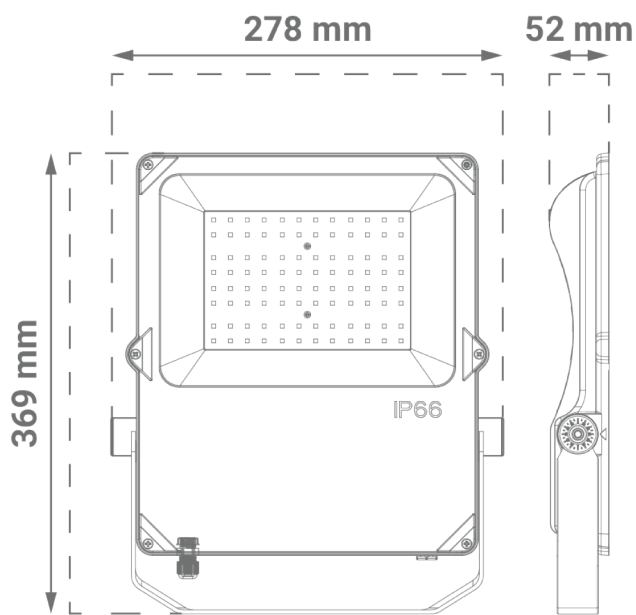

EN Product datasheet

PREMIUM100

LED floodlight
100 W | 4200 K | 15 000 lm

- Premium series, 150 lm / W
- MEANWELL LED driver
- Dimmable functionality for adjustable lighting in various environments



General informations

• Model	PREMIUM100
• LED chip	San`an
• Product color	Grey
• IP protection rate	IP66
• IK protection rate	IK08
• Material	Aluminum + Glass
• Installation	Recessed mounting

Electrical specifications

• Power consumption	100 W
• Voltage	AC 100 - 277 V / 50 - 60 Hz
• Dimmable	3 in 1 (0 - 10V, 10V, PWM)
• Working temperature	-30 °C to 45 °C

Lightning

• FLUX	15 000 lm
• Luminous efficiency	150 lm / W
• Color of the light	Neutral / daylight
• CCT	4200 K
• Color Render Index (CRI)	70
• Beam angle	120°
• Life span	50 000 working hours
• PF	0.95

Logistic information

• Net weight	
• Gross weight	
• Package dimensions	300 x 70 x 390 mm
• Transport package	4 pieces

Dimensions

- Product dimensions

278 x 52 x 369 mm

