

HR BA **Tehnički list**

# PREMIUM200

## LED reflektor

200 W | 4200 K | 30 000 lm

- Premium serija, 150 lm / W
- MEANWELL LED driver
- Mogućnost dimovanja za prilagodljivo osvjetljenje u raznim okruženjima



## Osnovne informacije

• Model	PREMIUM200
• LED diode	San`an
• Boja artikla	Siva
• IP stupanj zaštite	IP66
• IK stupanj zaštite	Siva
• Materijal	Aluminij + staklo

## Električne specifikacije

• Snaga	200 W
• Napon	AC 100 - 277 V / 50 - 60 Hz
• Dimabilnost	3 u 1 (0 - 10V, 10V, PWM)
• Radna temperatura:	-30 °C do 45 °C

## Osvjetljenje

• FLUX	30 000 lm
• Svjetlosna učinkovitost	150 lm / W
• Boja svjetlosti	Neutralna / dnevna
• CCT	4200 K
• Indeks prikaza boja (CRI)	70
• Kut svjetlosti	120°
• Radni vijek	50 000 radnih sati
• PF	0.95


## Logističke informacije

• Neto težina	
• Bruto težina	
• Dimenzije pakiranja	400 x 72 x 480 mm
• Transportno pakiranje	4 komada

## Dimenzije

- Dimenzije artikla

392 x 57 x 445 mm

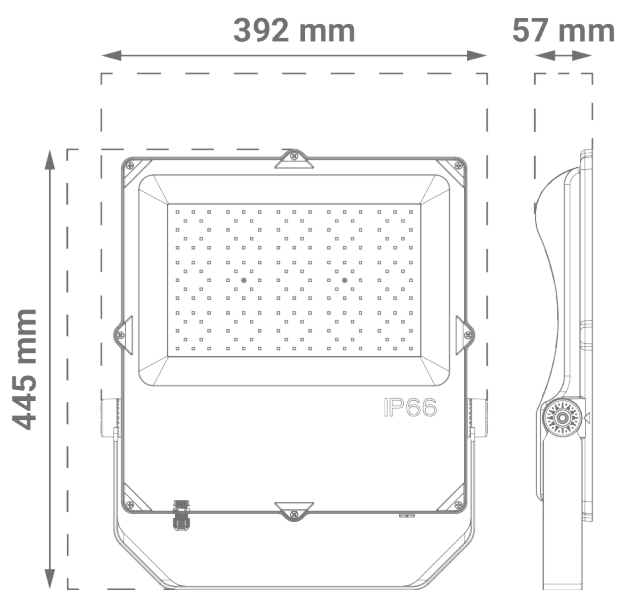

## SI Podatkovni list izdelka

# PREMIUM200

### LED reflektor

200 W | 4200 K | 30 000 lm

- Serija Premium, 150 lm / W
- LED MEANWELL
- Funkcija zatemnitve za prilagodljivo osvetlitev v različnih okoljih



## Osnovni podatki

• Model	PREMIUM200
• LED diode	San`an
• Barva izdelka	Siva
• IP stopnja	IP66
• IK stopnja	Siva
• Material	Aluminij + steklo
• Namestitev	Vgradnja v notranjost

## Električne specifikacije

• Moč	200 W
• Napetost	AC 100 - 277 V / 50 - 60 Hz
• Zatemnitev	3 v 1 (0 - 10V, 10V, PWM)
• Delovna temperatura	-30 °C do 45 °C

## Osvetlitev

- |                                    |                    |
|------------------------------------|--------------------|
| • FLUX                             | 30 000 lm          |
| • Svetlobna učinkovitost           | 150 lm / W         |
| • Barva svetlobe                   | Nevtralna          |
| • CCT                              | 4200 K             |
| • Indeks barvne reprodukcije (CRI) | 70                 |
| • Svetlobni kot                    | 120°               |
| • Življenjska doba                 | 50 000 delovnih ur |
| • PF                               | 0.95               |


## Logistični podatki

- |                        |                   |
|------------------------|-------------------|
| • Neto teža            |                   |
| • Bruto teža           |                   |
| • Dimenzije paketa     | 400 x 72 x 480 mm |
| • Transportna embalaža | 4 kosov           |

## Dimenzije

- Dimenzije izdelka

392 x 57 x 445 mm

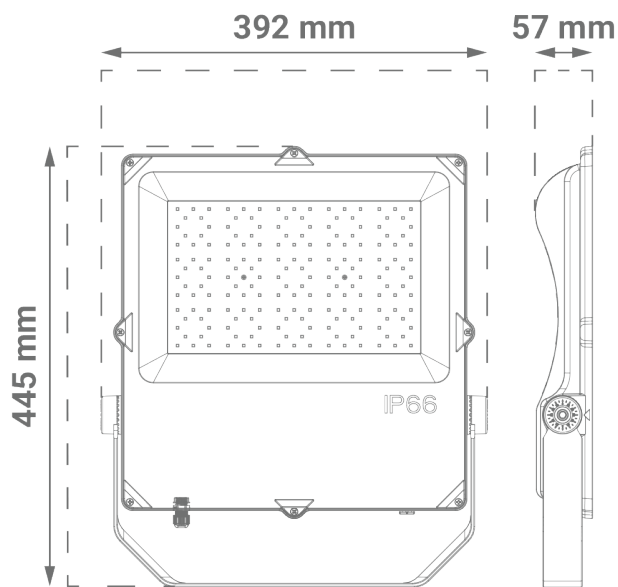



## DE Produktdatenblatt

# PREMIUM200

**LED-Flutlicht**  
200 W | 4200 K | 30 000 lm

- Premium-Serie, 150 lm / W
- MEANWELL LED-Treiber
- Dimmbare Funktionalität für einstellbare Beleuchtung in verschiedenen Umgebungen



## Allgemeine Informationen

• Modell	PREMIUM200
• LED Diode	San`an
• Produktfarbe	Grau
• IP-Schutzart	IP66
• IK-Schutzrat	Grau
• Material	Aluminium + Glas
• Einbau	Versenkte Montage

## Elektrische Spezifikationen

• Leistung	200 W
• Spannung	AC 100 - 277 V / 50 - 60 Hz
• Dimmbare Funktion	3 in 1 (0 - 10V, 10V, PWM)
• Arbeitstemperatur	-30 °C bis 45 °C

## Beleuchtung

• FLUX	30 000 lm
• Lichtausbeute	150 lm / W
• Helle Farbe	Neutral
• CCT	4200 K
• Farbwiedergabeindex (CRI)	70
• Lichtwinkel	120°
• Lebensdauer	50 000 Arbeitsstunden
• PF	0.95


## Logistik-Informationen

• Nettogewicht	
• Bruttogewicht	
• Abmessungen der Verpackung	400 x 72 x 480 mm
• Abmessungen der Transportverpackung	4 Stück

## Abmessungen

- Abmessungen des Produkts

392 x 57 x 445 mm

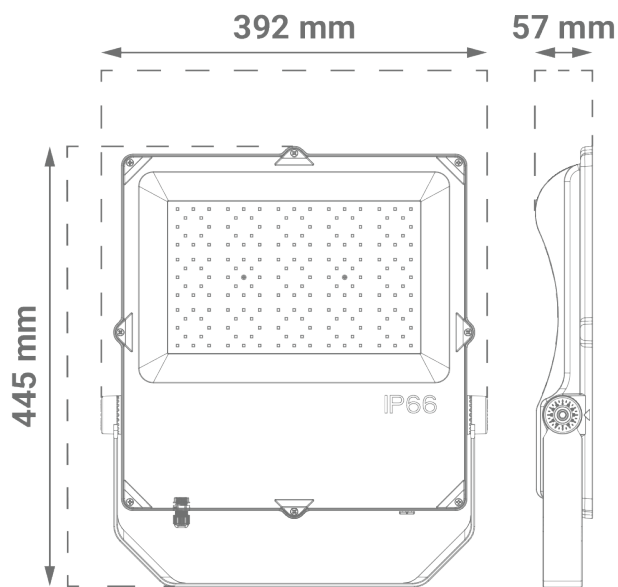

## EN Product datasheet

# PREMIUM200

**LED floodlight**  
200 W | 4200 K | 30 000 lm

- Premium series, 150 lm / W
- MEANWELL LED driver
- Dimmable functionality for adjustable lighting in various environments



## General informations

• Model	PREMIUM200
• LED chip	San`an
• Product color	Grey
• IP protection rate	IP66
• IK protection rate	Grey
• Material	Aluminum + Glass
• Installation	Recessed mounting

## Electrical specifications

• Power consumption	200 W
• Voltage	AC 100 - 277 V / 50 - 60 Hz
• Dimmable	3 in 1 (0 - 10V, 10V, PWM)
• Working temperature	-30 °C to 45 °C

## Lightning

• FLUX	30 000 lm
• Luminous efficiency	150 lm / W
• Color of the light	Neutral / daylight
• CCT	4200 K
• Color Render Index (CRI)	70
• Beam angle	120°
• Life span	50 000 working hours
• PF	0.95

## Logistic information

• Net weight	
• Gross weight	
• Package dimensions	400 x 72 x 480 mm
• Transport package	4 pieces

## Dimensions

- Product dimensions

392 x 57 x 445 mm

